


**TESI**

**Vas WC stativ, lipit de perete - AquaBlade®**

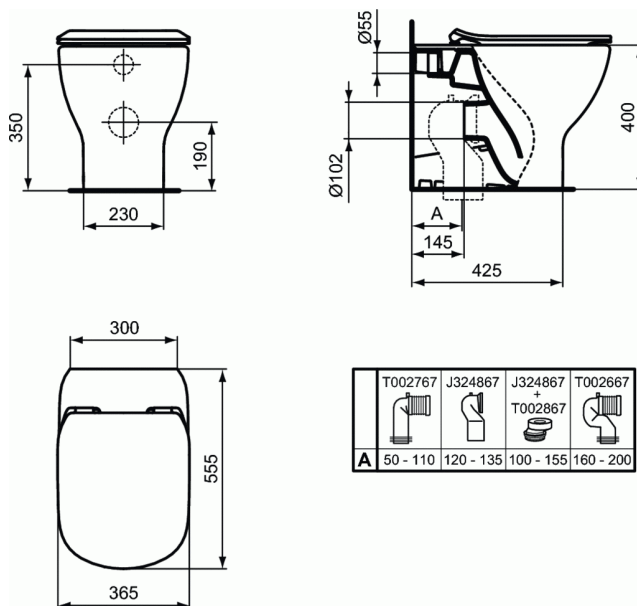

**Vas WC stativ, lipit de perete - AquaBlade®**

Cu evacuare orizontala (universala) si spalare verticala

Include: Set de fixare TT0257919

EN 997

in cutie de carton

Optiuni: Adaptor pentru scurgere verticala

Nota: Pentru AquaBlade WC-uri NU se recomanda instalarea cu valva de presiune

Echipare necesara:

- Capac vas WC SUBTIRE cu balamale metalice, duroplast (T352801)
- Capac vas WC SUBTIRE, inchidere lenta cu balamale usor de detasat, duroplast (T352701)

Optionale recomandate:

- Rezervor incastat pentru vas WC pe pardoseala - placuta de control nu este inclusa (W370067)
- Clapeta cu dubla actionare - logo Ideal Standard (pentru W370067) (W3091AA)
- Racord de scurgere 90° (120-150 mm) (J324867)
- Racord de scurgere 90° (160-200 mm) (T002667)
- Racord de scurgere 90° (50-110 mm) (T002767)
- Adaptor excentric in combinatie cu racord scurgere 90° (vertical) J324867 pentru 100-170 mm distanta (de la perete la centrul scurgerii) (T002867)
- Limitator (in cazul in care volumul de spalare total este mai mare de 6L pana la 9L) (WW965956)

**FINISAJ\***

01

\* 01 = Alb European

**NORME**

